




NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6.  ADHESIVE HEAT SHRINK, SECURED ARAMID YARN AND JACKET: 2 PLACES.
7.  HEAT SHRINK FOR STRAIN RELIEF: 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	11/08/2019	A.J.

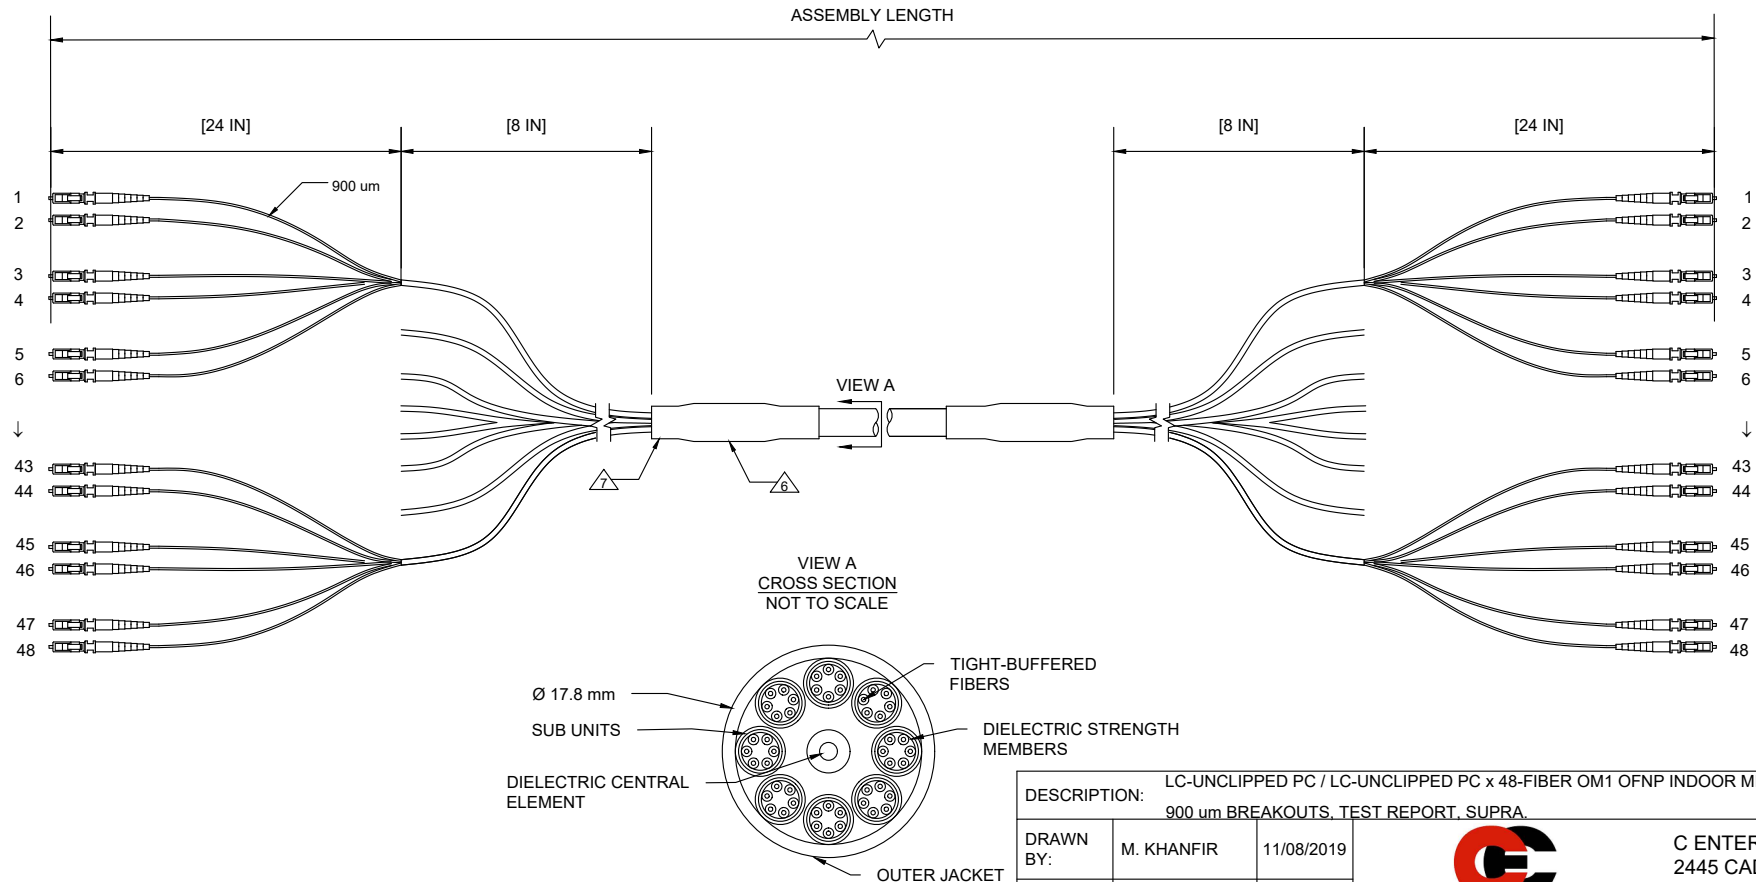

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	MULTIMODE PC TEST REPORT.
2	AR	MULTIMODE OM1 48 FIBER MIC® OFNP CABLE, ORANGE: CORNING.
1	96	LC-UNCLIPPED PC POLISH; BEIGE HOUSING, BLACK BOOT: PERFORMA.

MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION: LC-UNCLIPPED PC / LC-UNCLIPPED PC x 48-FIBER OM1 OFNP INDOOR MIC® CABLE, 900 um BREAKOUTS, TEST REPORT, SUPRA.			
DRAWN BY:	M. KHANFIR	11/08/2019	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	11/08/2019	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC/LC INDOOR OM1 x48 FIBER ASM	
PROPRIETARY AND CONFIDENTIAL		SIZE	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A
		SCALE: NOT TO SCALE	SHEET 1 OF 1