


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA, AND CLEANLINESS.
4. CLIPPED A-B / B-A TYPICAL. A-A / B-B STRAIGHT ON BY REQUEST. REMOVABLE CLIPS.
5. 2.0 mm DIAMETER TYPICAL. 1.6 mm AND 3.0 mm AVAILABLE.
6. POLISH TYPES: PC, UPC, APC.
7. TESTED TO 850 nm (MULTIMODE) OR TO 1550 nm (SINGLE-MODE) UPON REQUEST.
8. ALTERNATE COLOR JACKETS LISTED IN C ENTERPRISES STANDARDS.
9. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
10. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/11/2016	A.J.
A.1	-	TEST PERFORMANCE TABLE.	K.T.	11/15/2016	A.J.

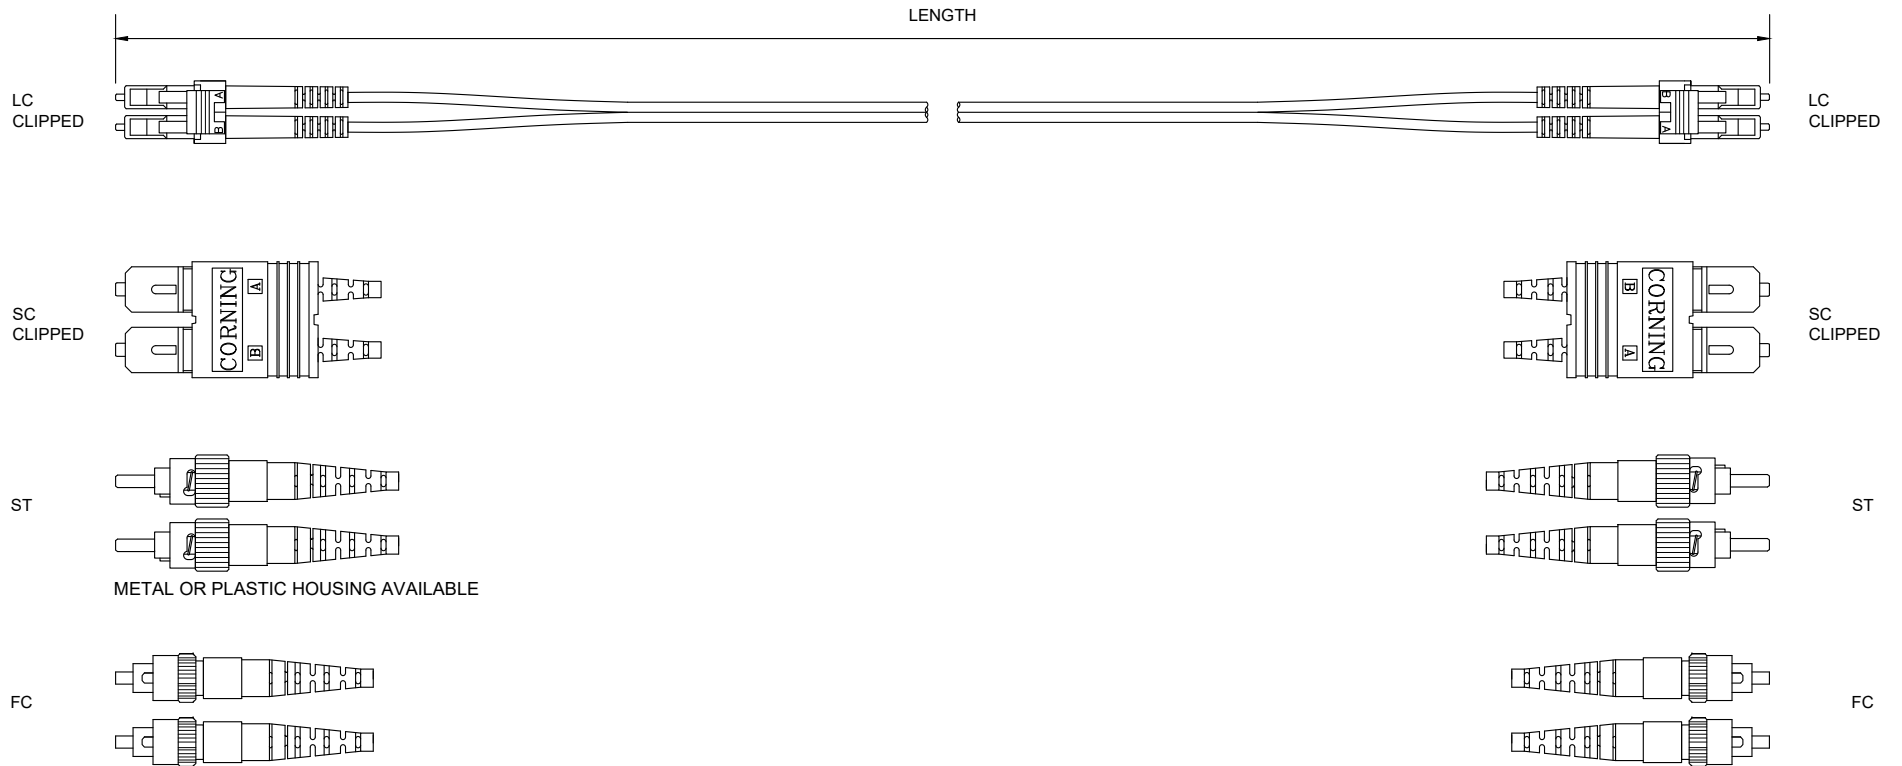

TEST PERFORMANCE						
TYPE	TEST FREQ.	FINISH	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
MULTIMODE	1300 nm	PC	<=0.75dB	0.20dB	N/A	25dB
SINGLE-MODE	1310 nm	UPC	<=0.50dB	0.20dB	>=50dB	60dB
SINGLE-MODE	1310 nm	APC	<=0.50dB	0.20dB	>=65dB	68dB

DRAWN BY:	K. THOMAS	02/09/2016
APVD BY:	A. JENSEN	03/11/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

PROPRIETARY AND CONFIDENTIAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: FIBER-DUPLEX-CORNING		
SIZE A	DWG. NO. FIBER-DUPLEX-CORNING	REV A.1
SCALE: NOT TO SCALE		SHEET 1 OF 1