




NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6.  ADHESIVE HEAT SHRINK, SECURED ARAMID YARN AND JACKET: 2 PLACES.
7.  HEAT SHRINK FOR STRAIN RELIEF: 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	11/08/2019	A.J.

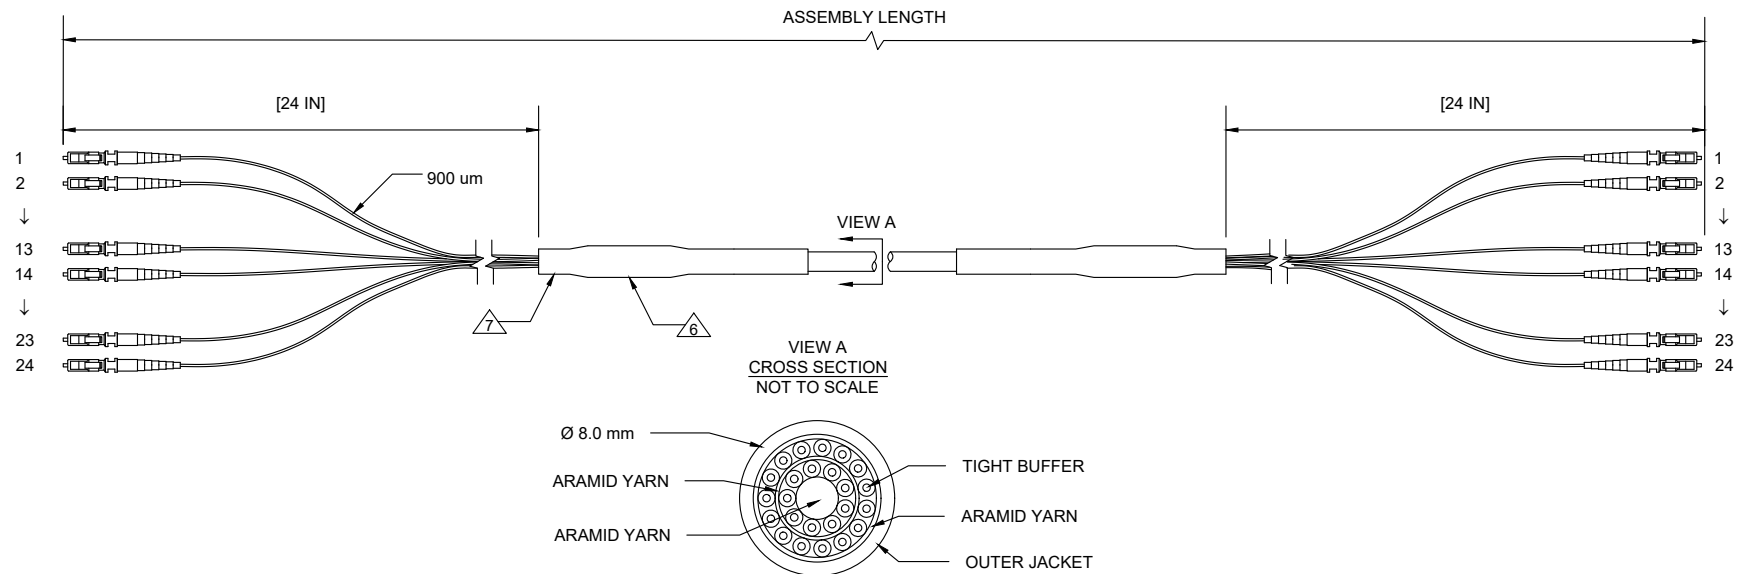

DESCRIPTION: LC-UNCLIPPED PC / LC-UNCLIPPED PC x 24-FIBER OM1 OFNP FREEDM® ONE CABLE, 900 um BREAKOUTS, TEST REPORT, SUPRA.

DRAWN BY:	M. KHANFIR	11/08/2019
APVD BY:	A. JENSEN	11/08/2019



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	MULTIMODE PC TEST REPORT.
2	AR	MULTIMODE OM1 24 FIBER OFNP IN/OUT FREEDM® ONE CABLE; ORANGE: CORNING.
1	48	LC-UNCLIPPED PC POLISH; BEIGE HOUSING, BLACK BOOT: PERFORMA.

MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]
PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: LC/LC IN/OUT OM1 24 FIBER ASM		REV
SIZE	DWG. NO.	A
A	MPPO24LBLB9RXSX	A
SCALE: NOT TO SCALE		SHEET 1 OF 1