


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. CLIPPED A-B / B-A, RECONFIGURABLE.


7 FIBER LEG LABEL. PLACED APPROX. 2 INCHES FROM CONNECTOR. 2 PLACES.

8 C-TERM. 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	09/24/2018	A.J.

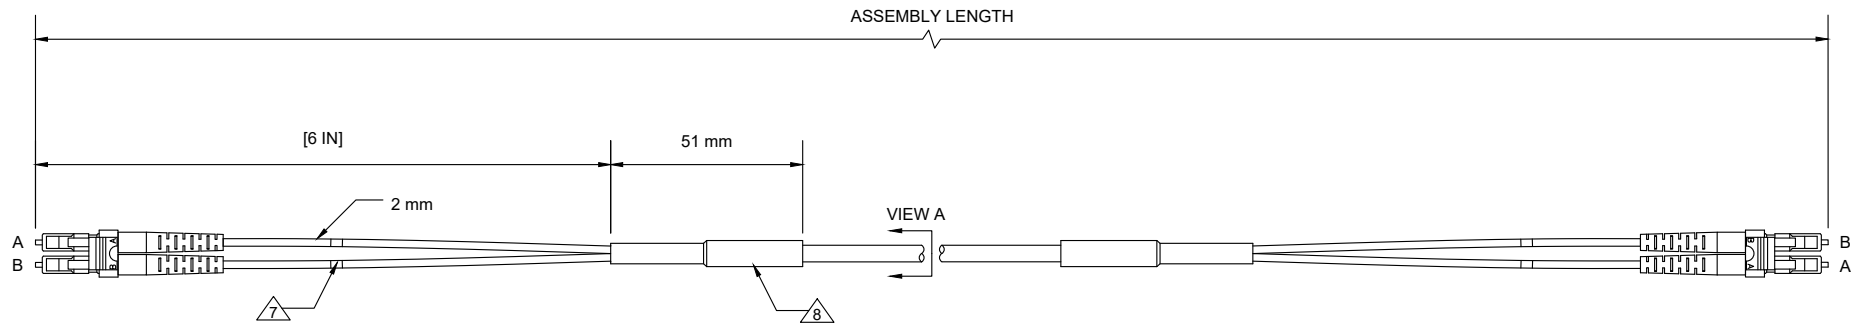


VIEW A
CROSS SECTION
NOT TO SCALE



BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	2	REVERSE C-TERM; 2 mm YELLOW FURCATION TUBES
2	AR	SINGLE-MODE OS2 2-FIBER OFNR 2 mm CABLE; YELLOW: PERFORMA.
1	2	LC-CLIPPED SINGLE-MODE OS2 UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA.

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION: LC-CLIP UPC POLISH / LC-CLIP UPC POLISH x 2-FIBER SINGLE-MODE OS2 OFNR 900 um REVERSE C-TERM 2 mm FURCATION.			
DRAWN BY:	M. KHANFIR	09/24/2018	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	09/24/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC/LC OS2 OFNR x2 FIBER IN/OUT ASM	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. SURO02LCLCRXXPX
		SCALE: NOT TO SCALE	REV A
		SHEET 1 OF 1	