
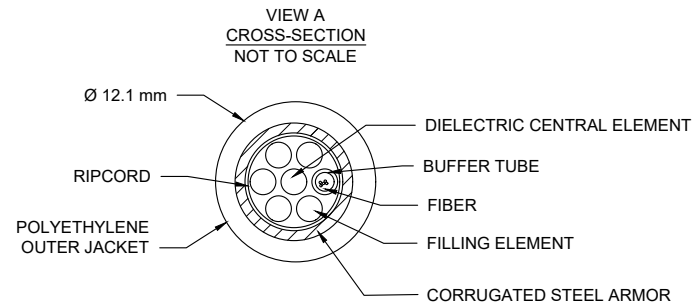


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
 2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
 5. CLIPPED A-B/B-A.
 6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
 7. HEAT SHRINK. 4 PLACES.
 8. SINGLE LEG BREAKOUT: OVERALL DIAMETER: 10 mm.
 9. NON DIMENSIONIZED ITEMS ARE BEST FIT.
- 9.1 SPIRAL WRAP ADD FOR STRAIN RELIEF.

| REV | ECR | DESCRIPTION | BY | DATE | CHECKED |
|-----|-----|-----------------|------|------------|---------|
| A | - | INITIAL RELEASE | M.K. | 12/21/2017 | A.J. |

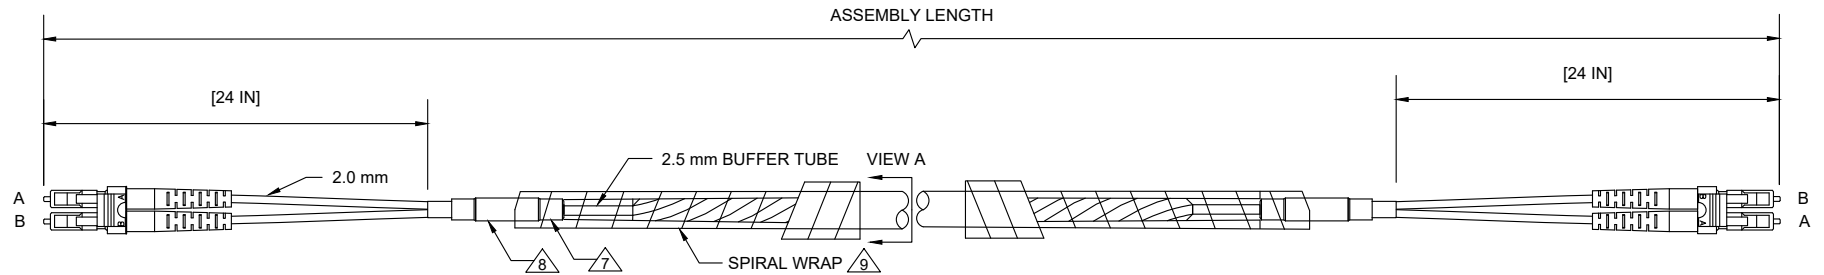

| BILL OF MATERIALS | | |
|-------------------|-----|---|
| ITEM | QTY | COMPONENT |
| 3 | 2 | SINGLE LEG BREAKOUT 2 FIBER; FURCATION 2mm, YELLOW |
| 2 | AR | SINGLE-MODE OS2 2-FIBER ARMOR OSP OUTDOOR CABLE; BLACK; CORNING |
| 1 | 4 | LC-CLIPPED UPC POLISH, BLUE HOUSING, BLUE BOOT: PERFORMA |

| UPC TEST LIMITS AT 1310 nm | | | |
|----------------------------|-----------|-----------|-----------|
| MAX. I.L. | TYP. I.L. | MIN. R.L. | TYP. R.L. |
| ≤0.50dB | 0.20dB | ≥50dB | 60dB |

| | | | |
|--|------------|--|--|
| DESCRIPTION: LC-CLIPPED/LC-CLIPPED UPC POLISH x2-FIBER OS2 ARMORED OSP CABLE, SINGLE LEG BREAKOUT, 2mm FURCATION; SUPRA | | | |
| DRAWN BY: | M. KHANFIR | 12/21/2017 |  C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111 |
| APVD BY: | A. JENSEN | 12/22/2017 | |
| DIMENSIONS: METRIC [IMPERIAL] | | TITLE: LC/LC x2-FIBER OSP ARMORED CABLE. | |
| PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED. | | SIZE: A DWG. NO.: SUOB02LCLCFXXSX | REV: A |
| | | SCALE: NOT TO SCALE | SHEET 1 OF 1 |