
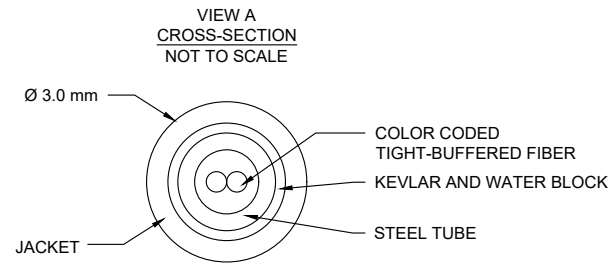


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. CLIPPED A-B/B-A.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP. 4 PLACES.
8. HEAT SHRINK FOR STRAIN RELIEF. 2 PLACES.
9. ADHESIVE HEAT SHRINK. 6 PLACES.
10. SINGLE LEG BREAKOUT: OVERALL DIAMETER: 6 mm. 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	02/21/2018	A.J.

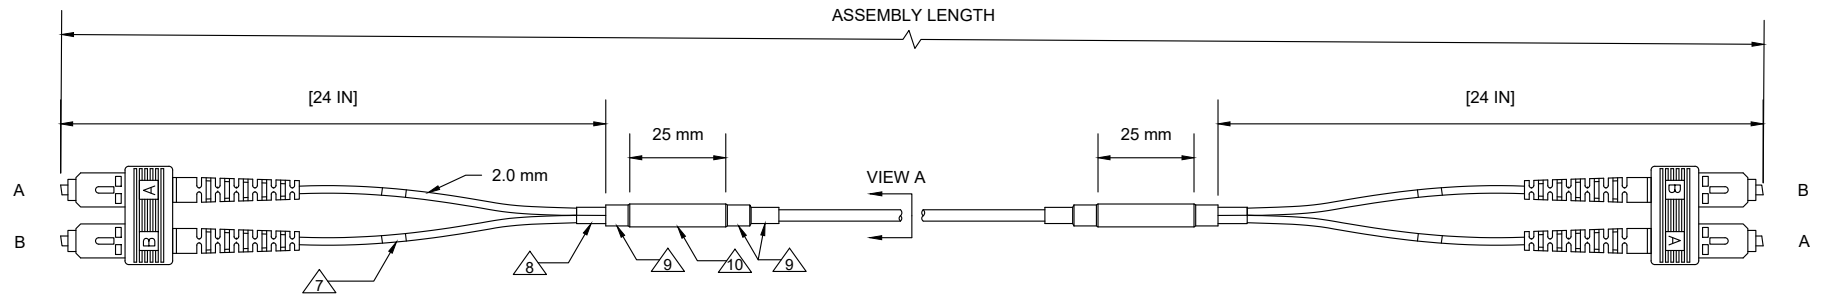

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	2	SINGLE LEG BREAKOUT: 2 mm FIBER LEGS, YELLOW.
2	AR	SINGLE-MODE OS2 2-FIBER MICRO ARMOR™ OFCP NDOOR/OUTDOOR CABLE; BLACK: PERFORMA.
1	4	SC-CLIPPED APC POLISH, GREEN HOUSING, GREEN BOOT: PERFORMA.

APC TEST LIMITS AT 1310 nm.			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥65dB	68dB

DESCRIPTION: SC-CLIPPED/SC-CLIPPED APC POLISH x2-FIBER OS2 MICRO ARMOR™ OFCP INDOOR/OUTDOOR CABLE, SINGLE LEG BREAKOUT.			
DRAWN BY:	M. KHANFIR	02/21/2018	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	02/21/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: SC/SC x2-FIBER SM OFCP MICRO ARMOR™ ASM.	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			
SIZE	DWG. NO.		REV
A	SAPQ02SCSCFXXPX		A
SCALE: NOT TO SCALE			SHEET 1 OF 1