

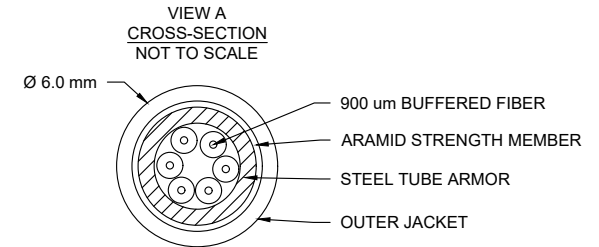
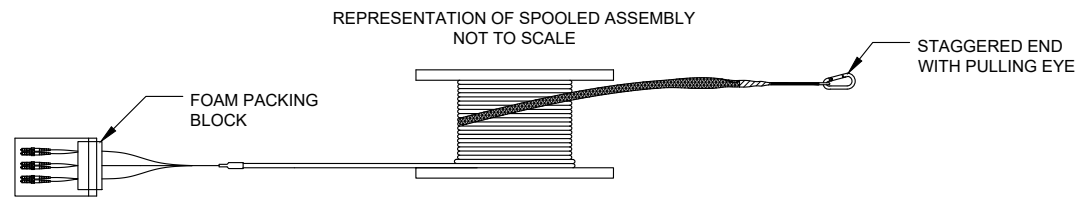
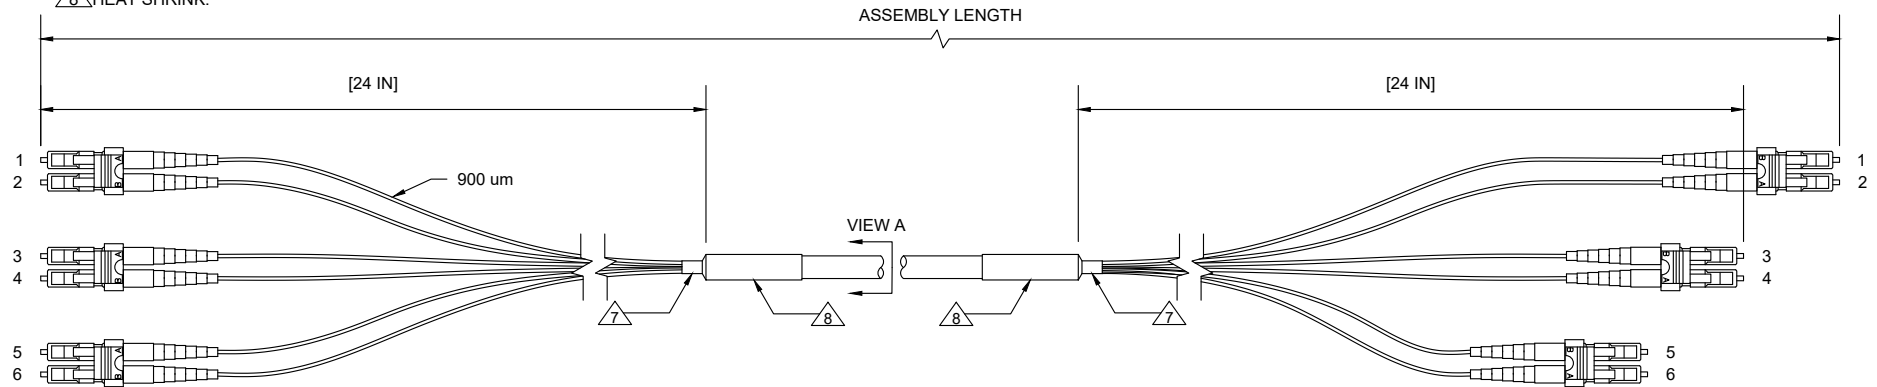


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. STAGGERED END WITH PULLING EYE
 - 6.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 6.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
 - 6.3. PAIRS 1-2 LONGEST: 25". PAIRS 5-6 SHORTEST: 23".

-  HEAT SHRINK FOR STRAIN RELIEF.
-  HEAT SHRINK.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	10/27/2017	A.J.



FIBERS AND CONNECTORS SECURED IN A FOAM BLOCK AND BAGGED.

DESCRIPTION: LC-CLIPPED/LC-CLIPPED PC POLISH x6-FIBER OM4 MICRO ARMOR™ OFCP INDOOR CABLE w/CP&G FIBER, 900 um BREAKOUT, TEST REPORT

DRAWN BY: K. THOMAS 09/05/2017
 APVD BY: A. JENSEN 10/27/2017



C ENTERPRISES
 2445 CADES WAY
 VISTA CA 92081
 760-599-5111

DIMENSIONS: METRIC [IMPERIAL]
 PROPRIETARY AND CONFIDENTIAL
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: LC/LC x6-FIBER OM4 OFCP MICRO ARMOR™
 SIZE: A DWG. NO.: HPPN06LCLC9RPPX REV: W1
 SCALE: NOT TO SCALE SHEET 1 OF 1

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	MULTIMODE PC TEST REPORT
3	1	PULLING EYE: 6 FIBERS, 900 um BUFFERED FIBER
2	AR	MULTIMODE OM4 6-FIBER MICRO ARMOR™ OFCP INDOOR CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
1	12	LC-CLIPPED PC POLISH, BEIGE HOUSING, WHITE BOOT: PERFORMA

PC TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A