



NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA, AND CLEANLINESS.
4. 2.0 mm DIAMETER TYPICAL. 900 um 1.6 mm and 3.0 mm ALSO AVAILABLE.
5. POLISH TYPES: PC, UPC, APC.
6. TESTED TO 850 nm (MULTIMODE) OR TO 1550 nm (SINGLE-MODE) UPON REQUEST.
7. ALTERNATE COLOR JACKETS LISTED IN C ENTERPRISES STANDARDS.
8. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
9. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/11/2016	A.J.
A.1	-	TEST PERFORMANCE TABLE.	K.T.	11/15/2016	A.J.

LENGTH

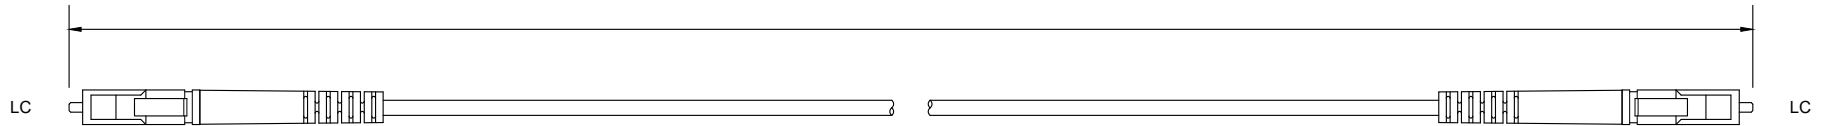


SC



SC




ST




ST

METAL OR PLASTIC HOUSING AVAILABLE



FC



FC

TEST PERFORMANCE						
TYPE	TEST FREQ.	FINISH	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
MULTIMODE	1300 nm	PC	<=0.75dB	0.20dB	N/A	25dB
SINGLE-MODE	1310 nm	UPC	<=0.50dB	0.20dB	>=50dB	60dB
SINGLE-MODE	1310 nm	APC	<=0.50dB	0.20dB	>=65dB	68dB

DRAWN BY:	K. THOMAS	02/09/2016
APVD BY:	A. JENSEN	03/16/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]
PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: FIBER-SIMPLEX CORNING		
SIZE A	DWG. NO. FIBER-SIMPLEX-CORNING	REV A.1
SCALE: NOT TO SCALE		SHEET 1 OF 1