


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. METHOD B POLARITY DEPICTED.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM TIP OF CONNECTOR.
8. HEAT SHRINK FOR STRAIN RELIEF.
9. HEAT SHRINK.
10. C-BREAK. OVERALL DIAMETER: 16 mm MAX.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	A. A.	04/14/2021	A. J.

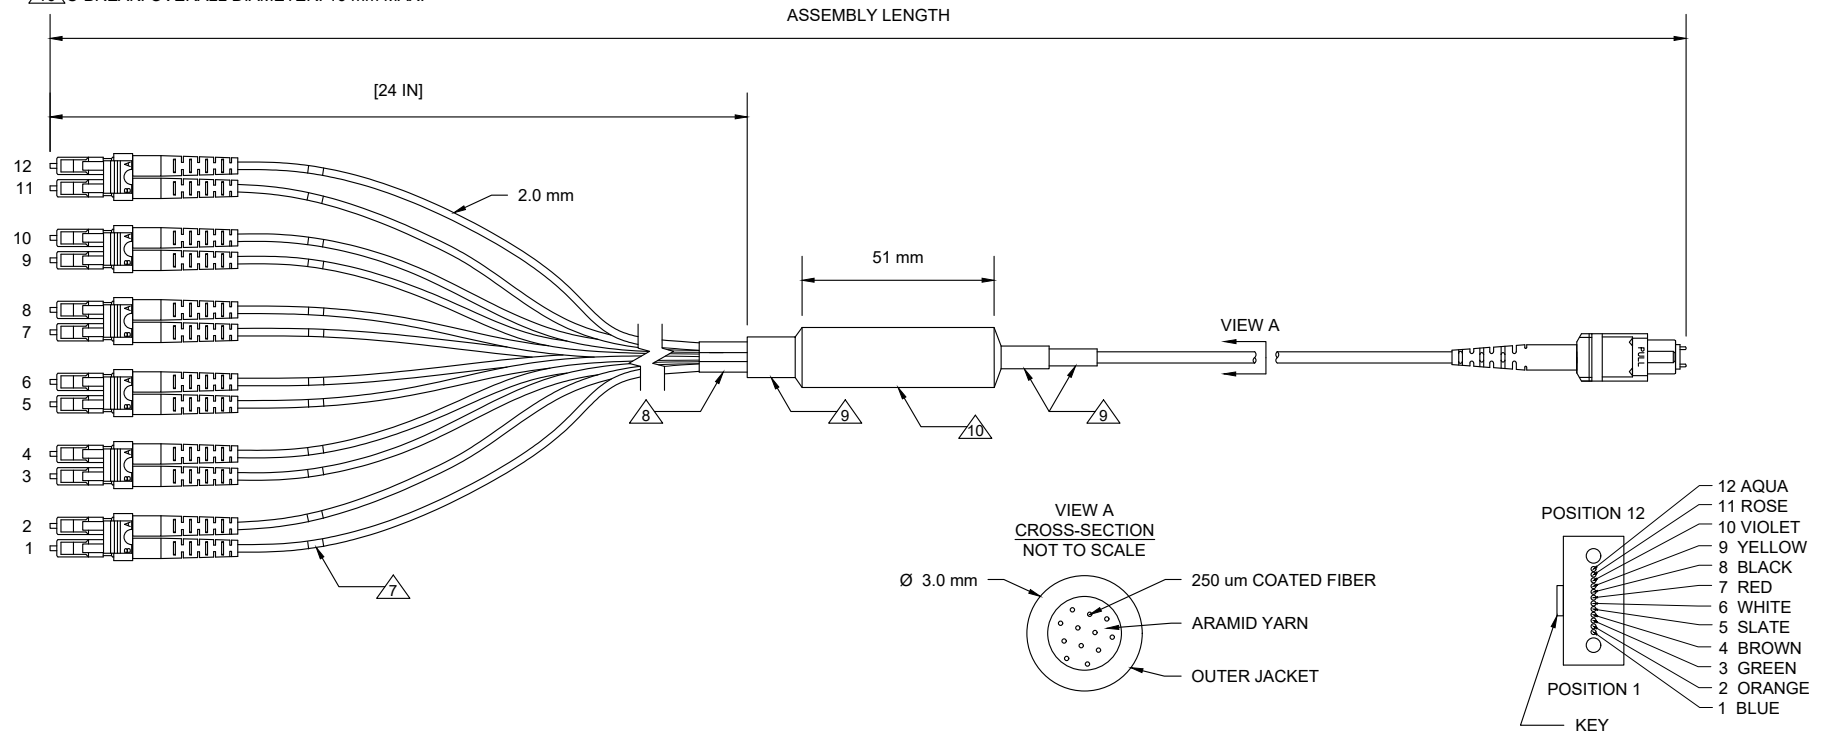

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
5	1	MULTIMODE TEST REPORT
4	1	C-BREAK 2: SINGLE LEG BREAKOUT, 2.0 mm LEGS, AQUA
3	AR	MULTIMODE OM4 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
2	12	LC-CLIPPED PC POLISH, BIEGE HOUSING, WHITE BOOT: PERFORMA
1	1	MTP-12 MALE MULTIMODE PC POLISH; AQUA HOUSING, AQUA BOOT: CORNING

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.75dB	0.20dB	N/A	25dB

DESCRIPTION:		LC-CLIP PC POLISH/MTP-12 MALE PC POLISH x 12-FIBER OM4 OFNP MIC 250 um W/ CP&G FIBER, TEST REPORT, METHOD B POLARITY			
DRAWN BY:	A. AGUILAR	04/14/2021	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	04/14/2021			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC/MTP-12 OM4 12-FIBER MIC 250 um		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	HPPG12LCMPFRXR	A
			SCALE: NOT TO SCALE		SHEET 1 OF 1