
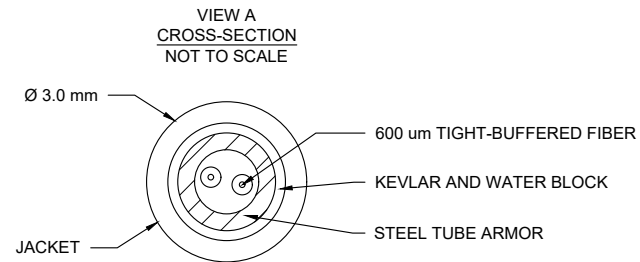



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	A. A.	01/27/2021	A. J.

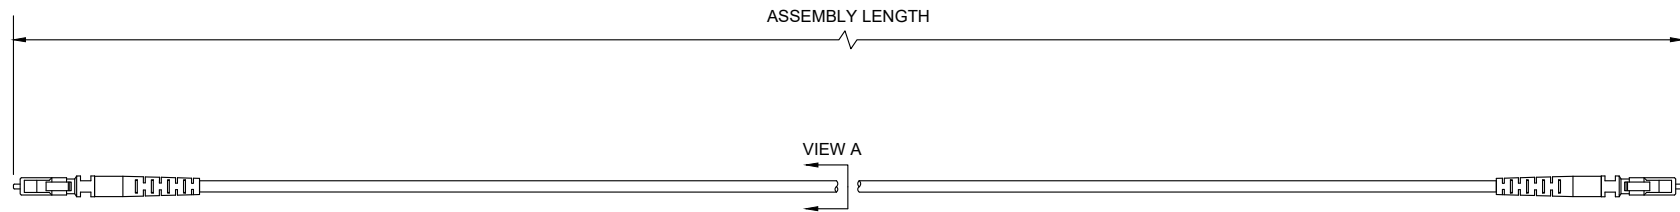

DESCRIPTION:		LC-NOCLIP/LC-NOCLIP UPC POLISH x1-FIBER 600um OSP SM MICRO ARMOR™ PE TINIFIBER CABLE, PERFORMA.			
DRAWN BY:	A. AGUILAR	01/27/2021	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	01/27/2021			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: LC/LC UPC OSP MICRO ARMOR™		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SUON01LBLBXXXXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	SINGLE-MODE OSP x2-FIBER 600um MICRO ARMOR™ TINIFIBER CABLE w/CORNING CLEARCURVE SM G.657.A2; BLACK: PERFORMA.				
1	2	LC UPC POLISH, BLUE HOUSING, BLUE 3.0 mm BOOT: PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB