




NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. HEAT SHRINK.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	10/10/2019	A.J.

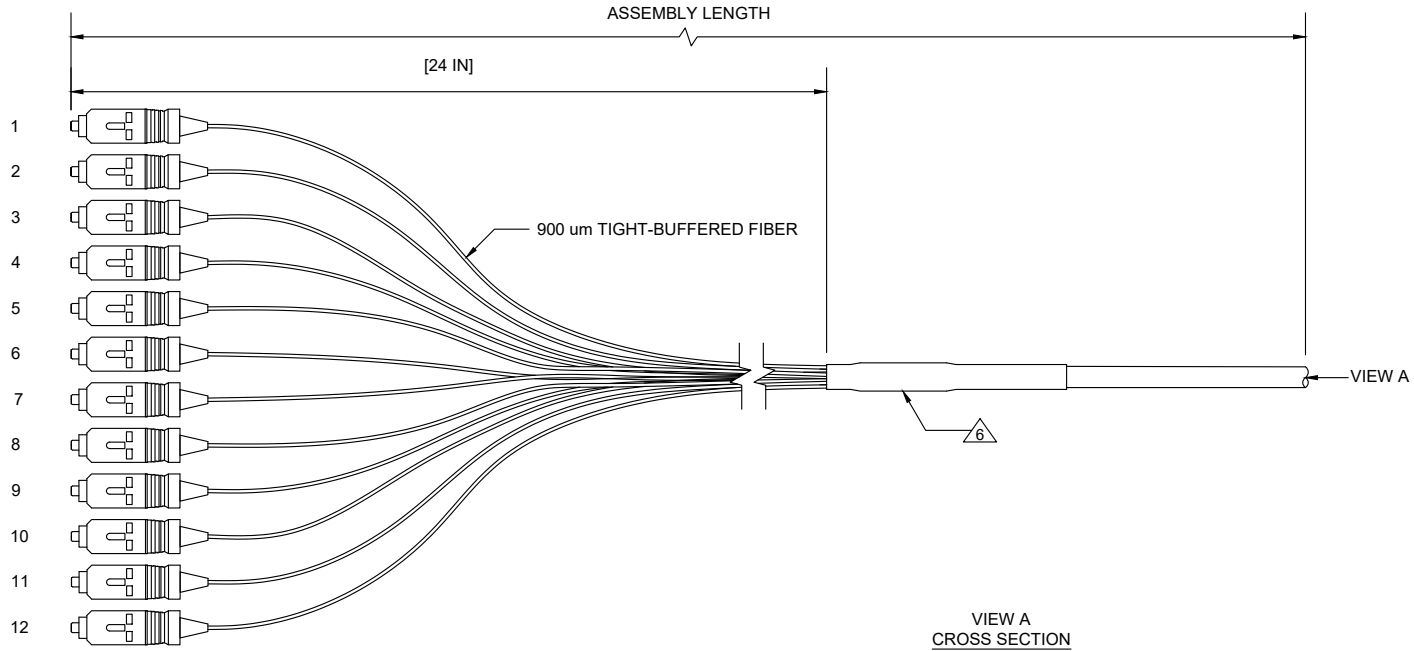

VIEW A  
CROSS SECTION  
NOT TO SCALE

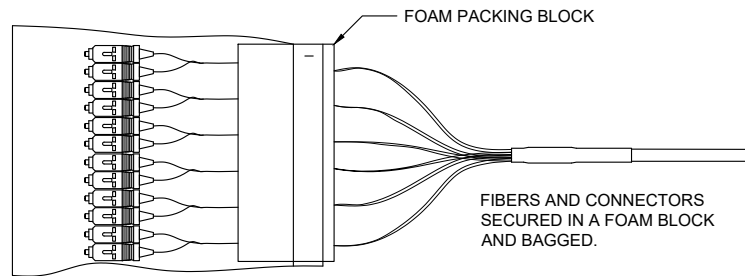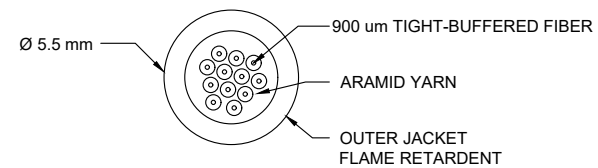

DESCRIPTION: SC UPC POLISH / UNTERM, 12 FIBER SINGLE-MODE OFNP DIST CABLE, 900 um BREAKOUT					
DRAWN BY:	M. KHANFIR	10/10/2019	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	10/10/2019			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: SC-UPC / UNTERM x12 FIBERS 900um INDOOR ASM		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	SUPI12SBXX9XXRX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm			
ITEM	QTY	PRODUCT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	SINGLE-MODE OS2 OFNP 12 FIBER DIST SMF-28 ULTRA INDOOR CABLE; YELLOW: CORNING GLASS AND PRINT				
1	12	SC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB