



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. HEAT SHRINK.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	12/20/2018	A.J.

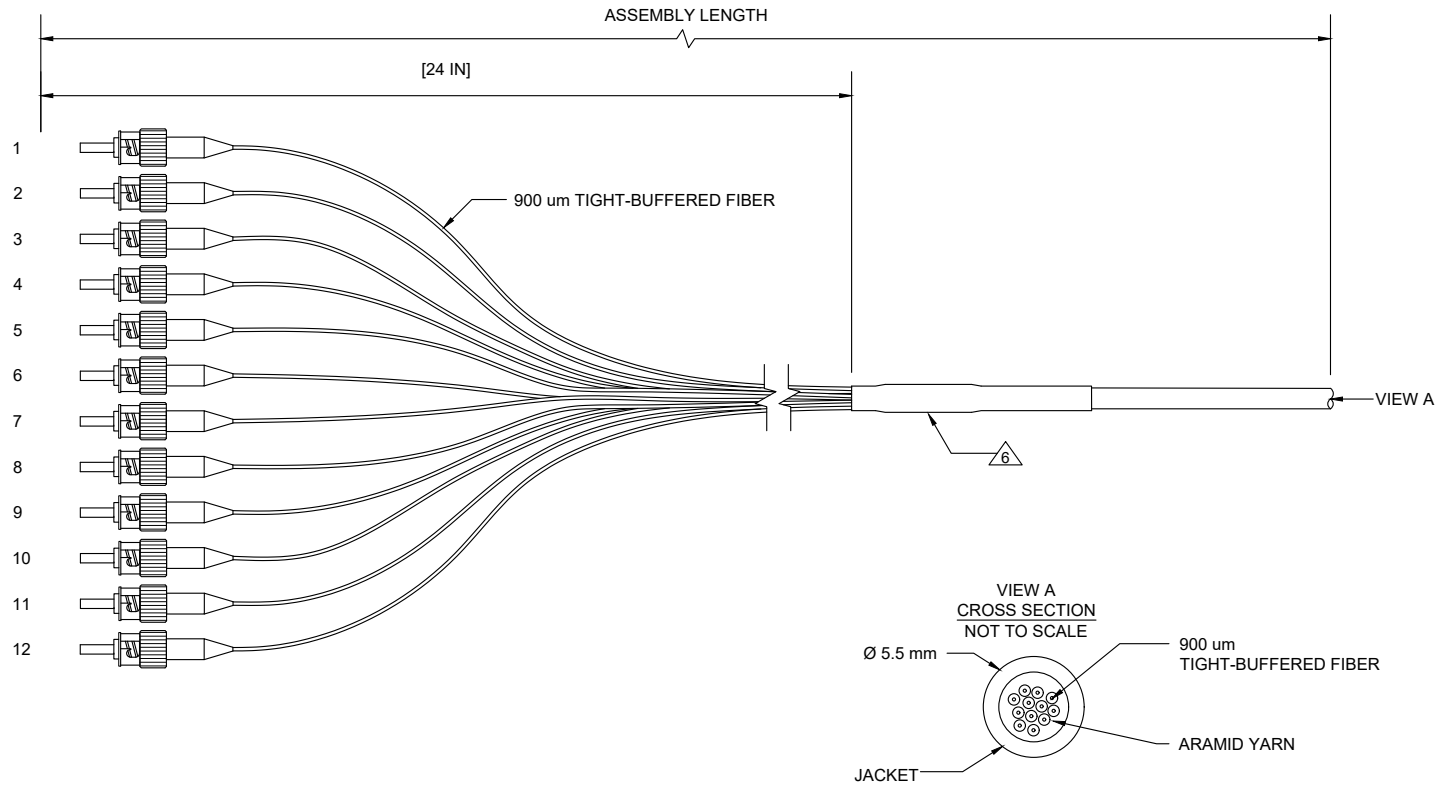

DESCRIPTION:		ST PC POLISH / UNTERMINATED x12 FIBER MULTIMODE OM1 OFNR INDOOR CABLE, 900 um BREAKOUT, PERFORMA.	
DRAWN BY:	M. KHANFIR	12/20/2018	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	12/20/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: ST/ UNTERM x12 FIBER OM1 ASM	
PROPRIETARY AND CONFIDENTIAL		SIZE	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A
		SCALE: NOT TO SCALE	
		SHEET 1 OF 1	

BILL OF MATERIALS		
ITEM	QTY	PRODUCT
2	AR	MULTIMODE OM1 900 um OFNR 12 FIBER INDOOR DIST CABLE; ORANGE: PERFORMA
1	12	ST PC POLISH; METAL HOUSING, BLACK BOOT: PERFORMA

MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A