

NOTES: UNLESS OTHERWISE SPECIFIED


1. C-BREAK 6: 24 FIBERS IN ONE FURCATION TUBE.
 - 1.1. CONFIGURED TO MTP 24 FIBER ARRAY CONNECTOR.
2. C ENTERPRISES ENGINEERING STANDARDS APPLY.
3. WHEN PULLING EYE REQUESTED, CONNECTORS AND SUBUNITS WILL BE STAGGERED BY DEFAULT.
 - 3.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 3.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
4. MTP FEMALE CONNECTOR SHOWN FOR REFERENCE ONLY.
5. LABEL LEG NUMBER.
6. C-BREAK. SEE TABLE 3 FOR OVERALL DIAMETER.
7. HEAT SHRINK FOR STRAIN RELIEF.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	05/12/2016	A.J.

TABLE 1 BREAKOUT LENGTH	
12 in	
18 in	
24 in [DEFAULT]	
36 in	
48 in	
1 M	
CUSTOM	

TABLE 2 C-BREAK LENGTH	
250 um COATED FIBERS	
LENGTH	FIBER COUNT
3 in	24

TABLE 3 C-BREAK OVERALL DIAMETER			
FIBERS	MIC	IN / OUT	OSP
24	1/2 in	TBD	TBD

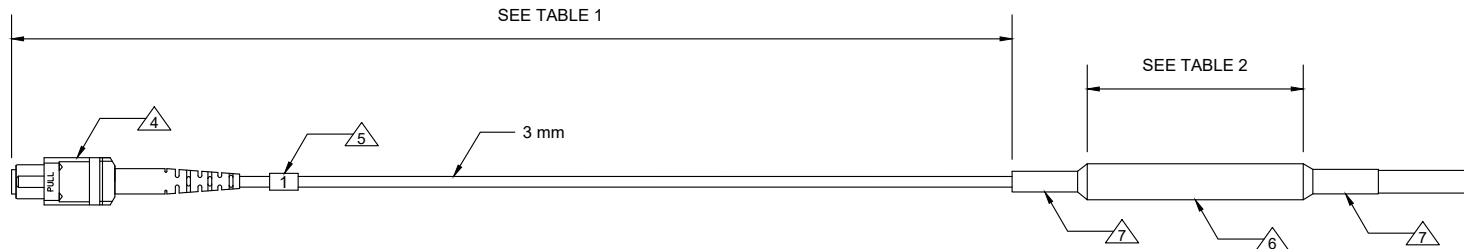

DRAWN BY:	K. THOMAS	02/05/2016	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	05/12/2016		
DIMENSIONS: METRIC [IMPERIAL]			TITLE: C-BREAK-BK6	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SIZE A	DWG. NO. C-BREAK-BK6
			SCALE: NOT TO SCALE	REV A
			SHEET 1 OF 1	