



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. TYPE B POLARITY DEPICTED.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

- 7. HEAT SHRINK.
- 8. C-BREAK. OVERALL DIAMETER: 14 mm.
- 9. HEAT SHRINK FOR STRAIN RELIEF.
- 10. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	03/14/2018	A.J.

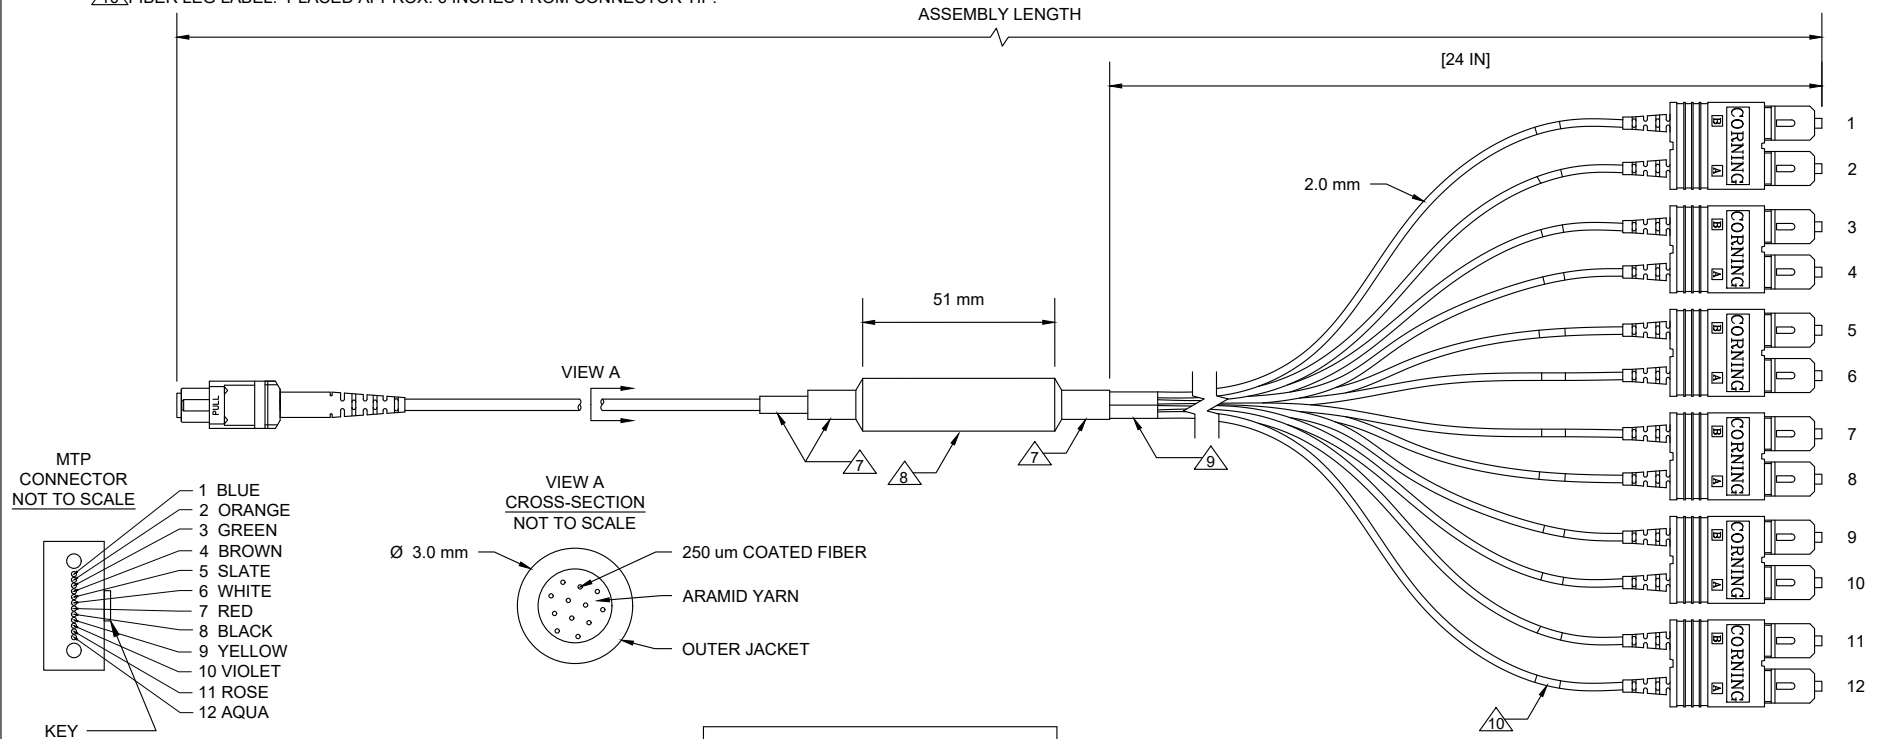

BILL OF MATERIALS			PC TEST LIMITS AT 1300 nm				DESCRIPTION: MTP-FEMALE PC POLISH / SC-CLIPPED PC POLISH x 12-FIBER OM4 OFNP MIC 250 um, SINGLE LEG BREAKOUT, TEST REPORT, TYPE B POLARITY, ULTRA.			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	DRAWN BY:	K. THOMAS	03/14/2018	
6	1	MULTIMODE PC TEST REPORT					APVD BY:	A. JENSEN	03/14/2018	
5	1	MULTIMODE PC MTP TEST REPORT	≤0.75dB	0.20dB	N/A	N/A	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111			
4	1	C-BREAK: 24in SINGLE LEG BREAKOUT, 2 mm LEGS, AQUA	MTP PC TEST LIMITS AT 1300 nm							DIMENSIONS: METRIC [IMPERIAL]
3	AR	MULTIMODE OM4 MIC 250um 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: CORNING					MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	12	SC-CLIPPED PC POLISH, BEIGE HOUSING, AQUA BOOT: CORNING					PROPRIETARY AND CONFIDENTIAL			
1	1	MTP-FEMALE MULTIMODE PC POLISH; AQUA HOUSING, BLACK BOOT: CORNING	≤0.75dB	0.20dB	N/A	N/A	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			
							SIZE	DWG. NO.		REV
							A	HPPG12MTSCFRXUX		A
							SCALE: NOT TO SCALE			SHEET 1 OF 1