


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. INDIVIDUALLY BAGGED.
7. LLU: LENGTH AND UNIT OF MEASURE.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	04/12/2017	A.J.

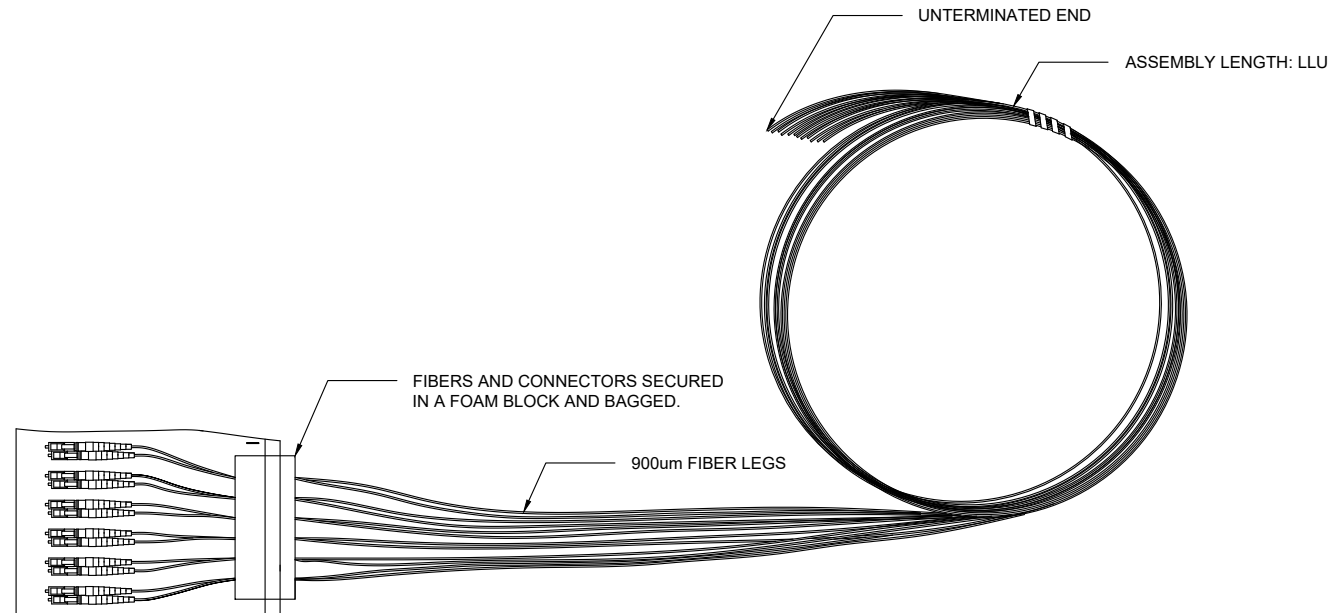

FIBER LEG COLOR	
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GREY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

BILL OF MATERIALS			
ITEM	QUANTITY	COMPONENT	
2	AR	FIBER SINGLE-MODE TB DIST CABLE: CORNING	
1	12	LC-NO CLIP UPC POLISH; BLUE HOUSING, BLUE BOOT: CORNING	

LC UPC POLISH CORNING CONNECTOR			
FIBER TYPE:	SINGLE-MODE		
CONNECTION DURABILITY:	500 MATINGS		
OPERATING ENVIRONMENT:	-40°C to +75°C		
TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION: LC-UNCLIPPED UPC x12-FIBER PIGTAIL SET, SINGLE-MODE TIGHT BUFFERED DIST CABLE, 900 um, CORNING, INDIVIDUAL BAG			
DRAWN BY:	K. THOMAS	04/12/2017	 <b>C-ENTERPRISES</b> <i>Connecting Today's Infrastructures</i>
APVD BY:	A. JENSEN	04/12/2017	
DIMENSIONS: METRIC [IMPERIAL]			TITLE: <b>SM 12 FIBER LC PIGTAIL CORNING</b>
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SIZE: <b>A</b> DWG. NO.: <b>SUBP12LBXXXXXUI</b> SCALE: NOT TO SCALE
			REV: <b>A</b> SHEET 1 OF 1