
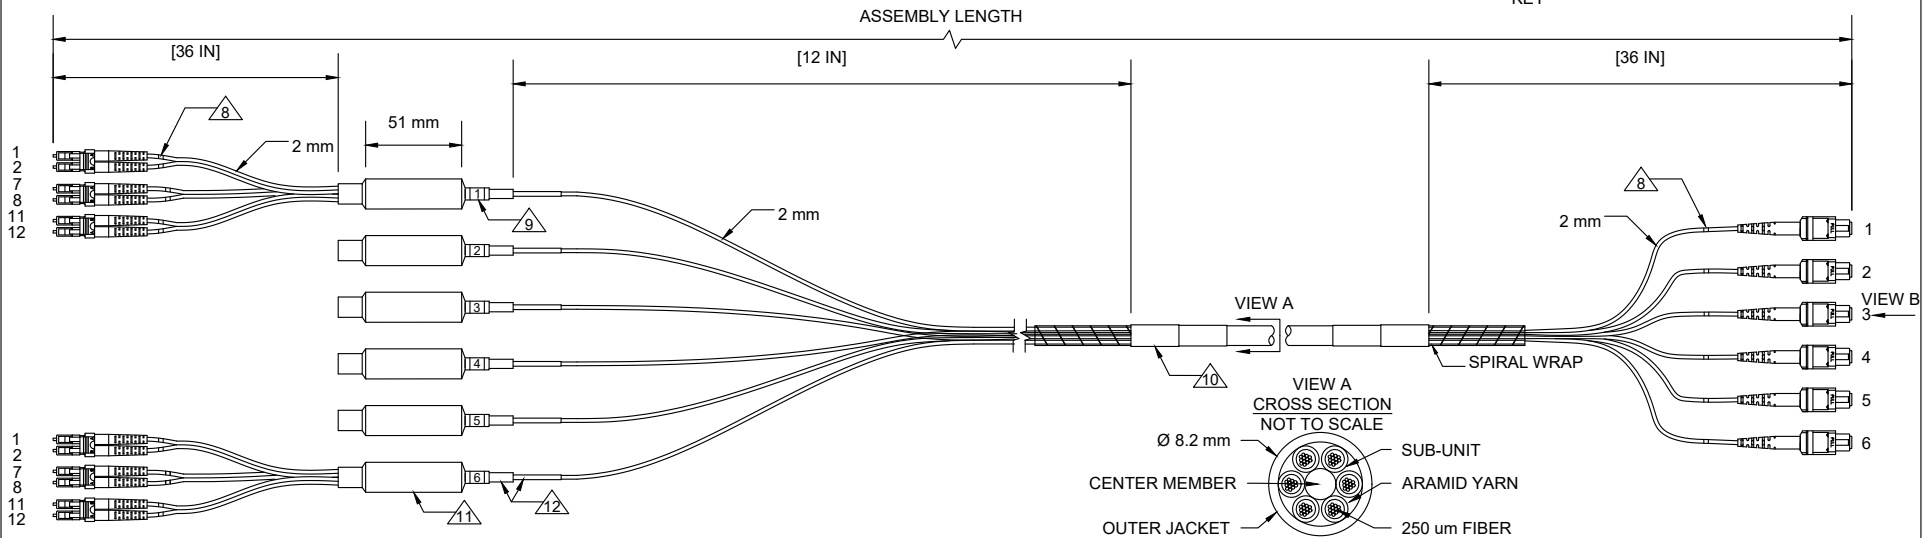



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. 72 FIBER ASSEMBLY. FOR DRAWING CLARITY NOT ALL CONNECTORS ARE SHOWN.
7. METHOD B POLARITY.
8. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR. 78 PLACES.
9. SUBUNIT LEG LABEL. CORRESPONDS TO MTP SUBUNITS.
10. HEAT SHRINK FOR STRAIN RELIEF. 2 PLACES.
11. SINGLE LEG BREAKOUT: 6 PLACES. OVERALL DIAMETER: 14 mm
12. HEAT SHRINK FOR STRAIN RELIEF. 6 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	02/05/2020	A.J.



BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm				DESCRIPTION: MTP-12 APC / LC CLIP UPC SINGLE-MODE 72 FIBER MICROCORE® 250um OFNP CABLE, SINGLE LEG BREAKOUT 36 IN, TEST REPORTS, TYPE B POLARITY, PERFORMA.				
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	DRAWN BY:	M. KHANFIR	02/05/2020	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
6	1	SINGLE-MODE APC MTP TEST REPORT					APVD BY:	A. JENSEN	02/05/2020		
5	1	SINGLE-MODE UPC TEST REPORT	≤0.50dB	0.20dB	≥50dB	60dB	DIMENSIONS: METRIC [IMPERIAL]		TITLE: MTP / LC-CLIPPED x72 FIBER SM ASM		
4	6	C-BREAK 2: 36 in SINGLE LEG BREAKOUT, 2.0 mm LEGS, YELLOW	MTP APC TEST LIMITS AT 1310 nm				PROPRIETARY AND CONFIDENTIAL		SIZE: A		REV: A
3	AR	SINGLE-MODE OS2 72-FIBER MICROCORE® OFNP CABLE, YELLOW: PERFORMA					MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	DWG. NO. SBPG72MTLCFRXP5
2	1	MTP-12 FEMALE SINGLE-MODE APC POLISH; GREEN HOUSING, BLACK BOOT: CORNING	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SHEET 1 OF 1		
1	72	LC-CLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA	≤0.50dB	N/A	≥60dB	N/A					