
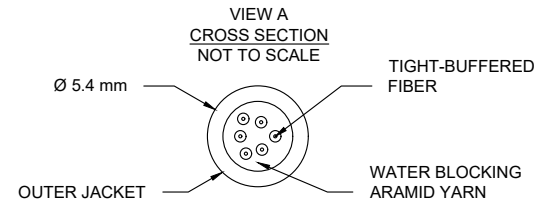


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. STAGGERED END w/ PULLING EYE
  - 6.1. CONNECTORS STAGGERED IN 1 INCH INCREMENTS.
  - 6.2. CONNECTOR STAGGER ALTERNATES BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
  - 6.3. CONNECTOR 1 LONGEST: 37 INCHES. CONNECTOR 3 SHORTEST: 35 INCHES.

- 7. FIBER LEG LABEL. 6 PLACES.
- 8. HEAT SHRINK FOR BREAKOUT PROTECTION.
- 9. SINGLE LEG BREAKOUT: APPROX. OVERALL DIAMETER: 10 mm. 2 PLACES
- 10. ADHESIVE LINED HEAT SHRINK. 4 PLACES.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	09/24/2021	A.J.

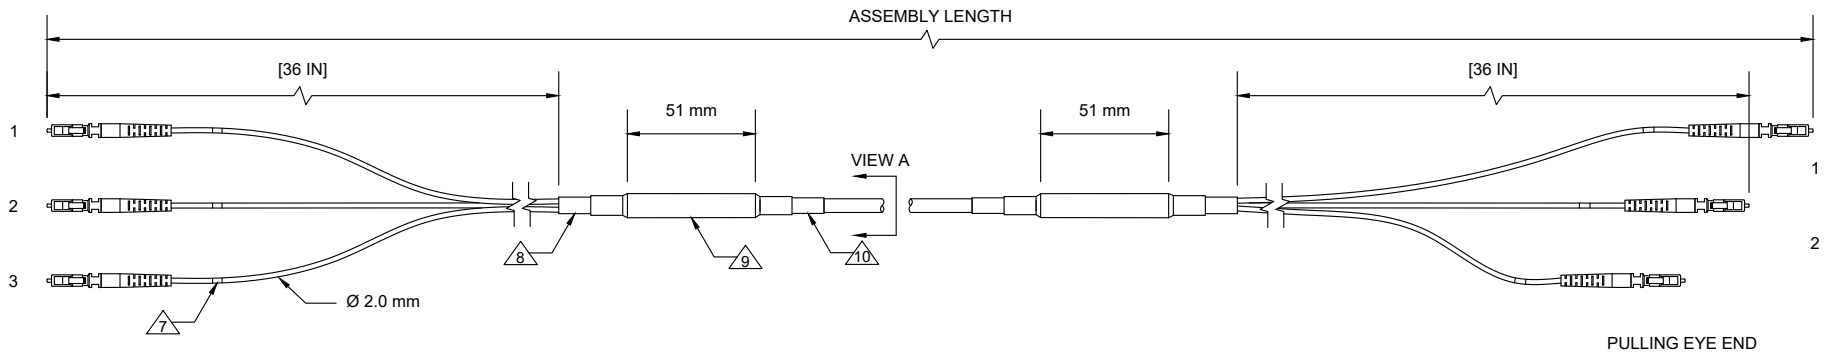

BILL OF MATERIALS

ITEM	QTY	COMPONENT
5	1	PULLING EYE: CONNECTORS STAGGERED
4	1	UPC TEST REPORT; 1310 nm
3	2	SINGLE LEG BREAKOUT: 2.0 mm FIBER LEGS, BLACK OSP FURCATION, 36 IN.
2	AR	SINGLE-MODE OS2 6-FIBER IN/OUT OFNP CABLE, BLACK.
1	6	LC NO-CLIP UPC POLISH; BLUE HOUSING, BLUE BOOT; PERFORMA

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	20dB	≥50dB	60dB

DESCRIPTION: LC NO-CLIP UPC TO LC NO-CLIP UPC, x3-FIBER, SINGLE-MODE OS2 IN/OUT CABLE, 36 IN SINGLE LEG OSP BREAKOUTS, TEST REPORT, PULLING EYE.			
DRAWN BY:	K. THOMAS	09/24/2021	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	09/24/2021	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC UPC/LC UPC IN/OUT 3-FIBER ASSM	
PROPRIETARY AND CONFIDENTIAL		SIZE	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A
		DWG. NO.	
		SUP003LBLBJRPP5	
		SCALE: NOT TO SCALE	SHEET 1 OF 1