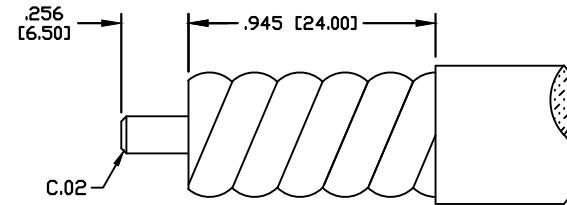

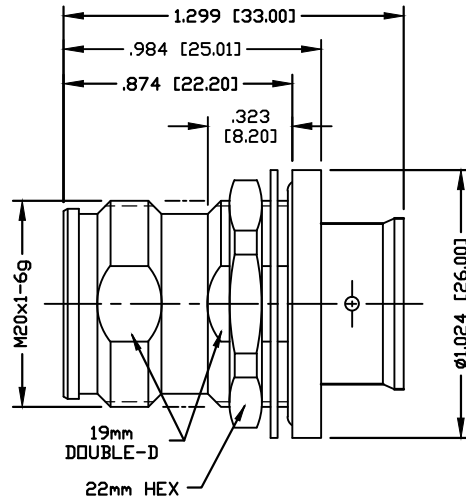


PART NO.

**RFD-43FBH-H4**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	10/29/19	JDMc

**RECOMMENDED STRIPING DIMENSIONS****USE OF CABLE TRIM TOOL IS RECOMMENDED****USE COMPATIBLE TRIM TOOL SUCH AS TRIM-SET-S12-D01****SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

VSWR: &lt;1.15:1 THRU 3 GHz

PIM:  $\leq -160$  dBcINSULATION RESISTANCE: 5000M $\Omega$ 

TEMPERATURE RANGE: -55°C TO 85°C

MECHANICAL DURABILITY: 500 CYCLES

FOR FSJ4-50B, SCF12-50J, SPF &amp; SPO-500 CABLE

7	HEX NUT	1	BRASS	WHITE BRONZE
6	WASHER	1	BRASS	WHITE BRONZE
5	O-RING	1	RUBBER	---
4	INSULATOR	1	PTFE	---
3	CONTACT	1	PHOSPHOR BRONZE	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER

OUTLINE DRAWING

ALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]DRAWN  
C. ZUNIGA 10/29/19  
CHECKEDORJ DRAWN  
C. ZUNIGA 10/29/19**RoHS  
COMPLIANT**PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.**RFconnectors**7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX**4.3/10 FEMALE, BULKHEAD**

DIRECT SOLDER - 1/2" SUPERFLEX CABLE

SIZE	CABLE GROUP	DWG NO.	REVISION
A	N/A	<b>RFD-43FBH-H4</b>	---
SCALE:	ENGINEERING ID:	000000	SHEET 1 OF 1
NTS			