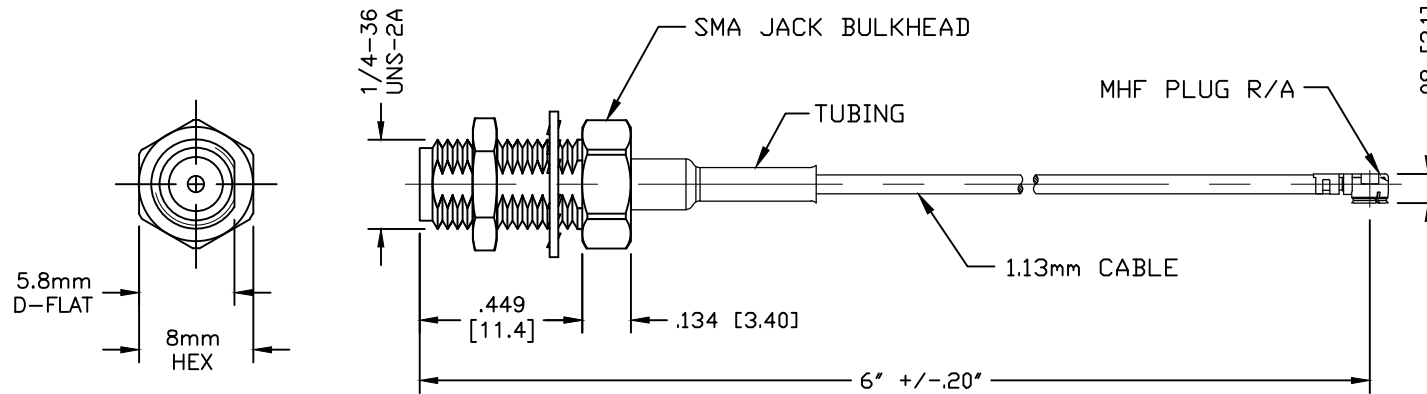


PART NO.

RFW-10531-6

REV	DESCRIPTION	DWN	DATE	APPROVED
B	UPDATED DRAWING THROUGHOUT	CZS	08/01/18	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-6 GHz
 VSWR: 1.2 @ 2.4 GHz, 1.5 MAX. @ 6 GHz
 INSERTION LOSS(dB): 1.5 dB MAX @ 6 GHz

NOMINAL ATTENUATION:

3.43dB/m @ 3GHz
 5.13dB/m @ 6GHz

CABLE FEATURES:

SILVER PLATED CENTER CONDUCTOR 32 AWG
 FEP DIELECTRIC (INSULATION)
 TIN PLATED COPPER BRASS
 FEP JACKET

#	DESCRIPTION	QTY	MATERIAL / FINISH
6	HEX NUT	1	GOLD
5	LOCK WASHER	1	GOLD
4	TUBING	1	HEAT SHRINK
3	1.13mm CABLE	1	---
2	MHF PLUG RIGHT ANGLE	1	GOLD
1	SMA JACK BULKHEAD	1	GOLD
#	DESCRIPTION	QTY	MATERIAL / FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	08/01/18
CHECKED	
ORJ DRAWN JDMc	10/27/03

**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES, ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**SMA JACK BULKHEAD TO U.FL
 CABLE ASSEMBLY**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFW-10531-6	B
SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	