
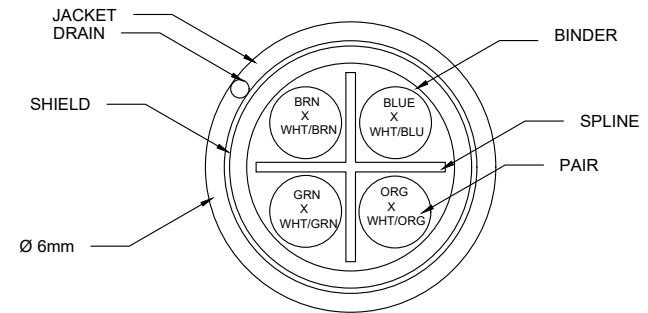
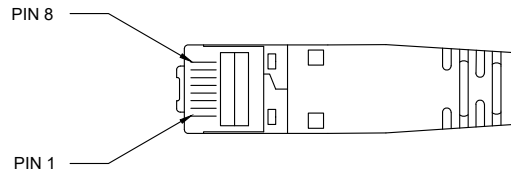


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.2.
3. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
4. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
5. WIRING CONFIGURATION:568B STRAIGHT.
6. TESTED FOR CONTINUITY, SHORTS, WIRE MAPPING AND OVERALL INTEGRITY. CHANNEL PERFORMANCE.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	07/20/2018	A.J.

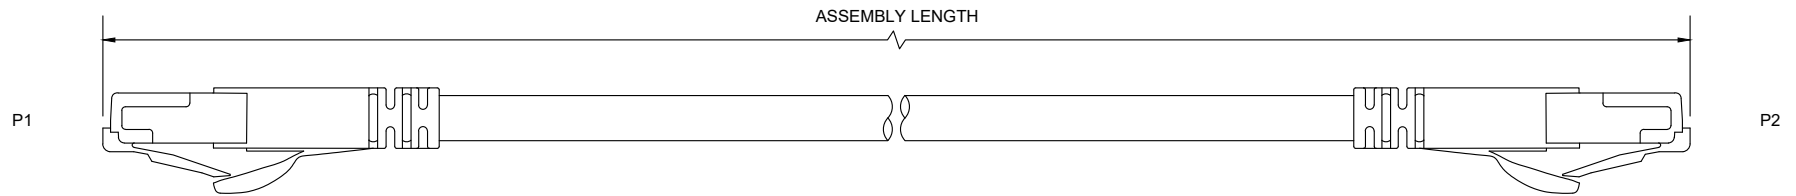

WIRING CONFIGURATION 568B STRAIGHT

P1	COLOR CODE	P2
1	WHITE/ORANGE	1
2	ORANGE/WHITE	2
3	WHITE/GREEN	3
4	BLUE/WHITE	4
5	WHITE/BLUE	5
6	GREEN/WHITE	6
7	WHITE/BROWN	7
8	BROWN/WHITE	8
SHELL GROUND	SHIELD	SHELL GROUND

CABLE PROPERTIES		
OPERATING ENVIRONMENT	-20°C TO +75°C	
JACKET MATERIAL	POLYVINYLCHLORIDE	
FREQUENCY/ELECTRICAL	250 MHz/100 Ohm/300V	
BILL OF MATERIALS		
ITEM	QUANTITY	COMPONENT
2	AR	STP 4PR CAT6 26 SOLID w/SPLINE STRANDED SHIELDED CMR ; COLOR: AS REQUESTED
1	2	RJ45 8x8 CAT 6 SHIELDED STP CONNECTOR WITH BLACK SLIM SNAGLESS

DESCRIPTION: RJ45 SHIELDED/ RJ45 SHIELDED STP CAT6 PATCH CORD ASSEMBLY, 568B STRAIGHT.			
DRAWN BY:	M. KHANFIR	07/20/2018	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	07/20/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: RJ45/ RJ45 STP CAT6 PATCH CORD ASM	
PROPRIETARY AND CONFIDENTIAL		SIZE	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A
		SCALE: NOT TO SCALE	
		SHEET 1 OF 1	